




# Pandigital Super Nova Front Facing Camera Replacement

Remove the front facing camera of the Pandigital Super Nova.

Written By: sterling hannsz

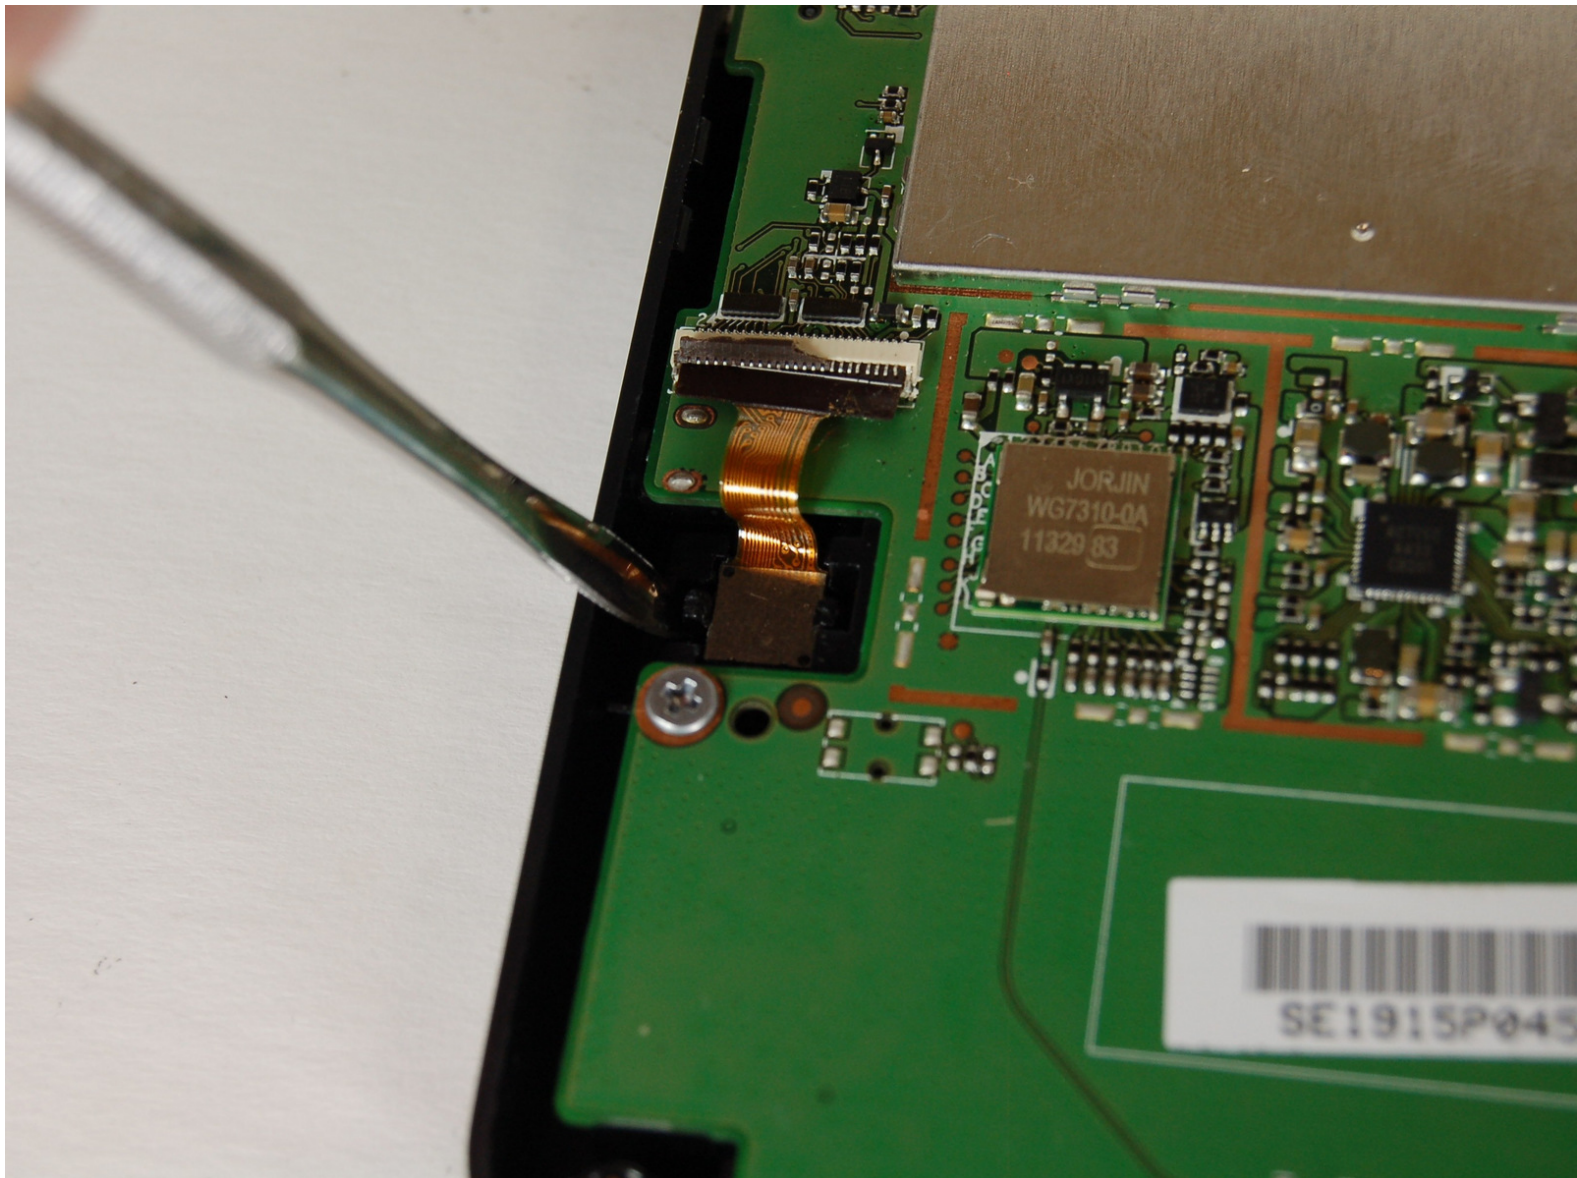

## INTRODUCTION

This guide demonstrates in detail how to remove and replace a Pandigital Super Nova front facing camera in order to preserve the function of the camera. See the battery replacement guide for instructions for taking off the back cover.


---



### TOOLS:


- [iFixit Opening Tools](#) (1)
  - [Metal Spudger Set](#) (1)
  - [Phillips #0 Screwdriver](#) (1)
  - [Tweezers](#) (1)
-

## Step 1 — Battery

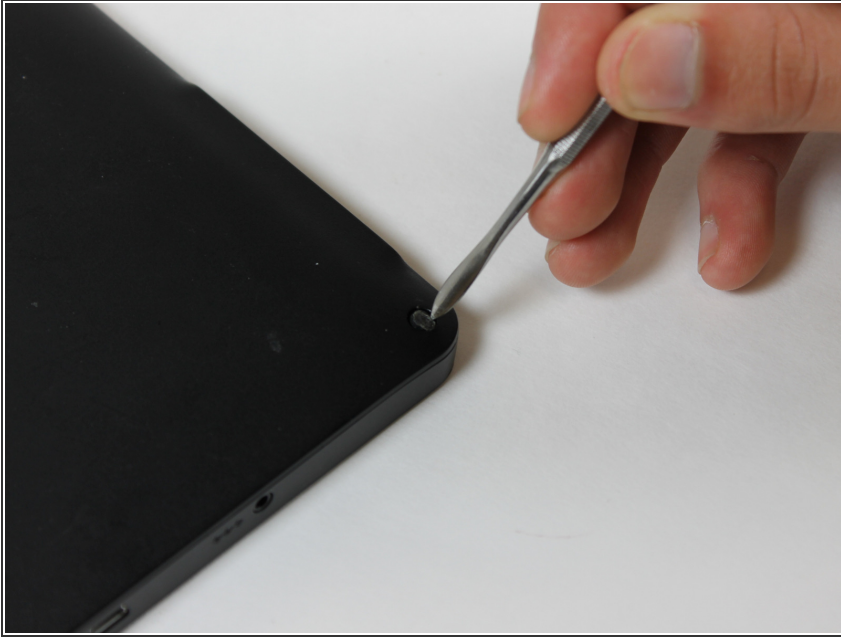

- Remove the screw covers from each corner of the back side of the device.
- Set aside.

## Step 2

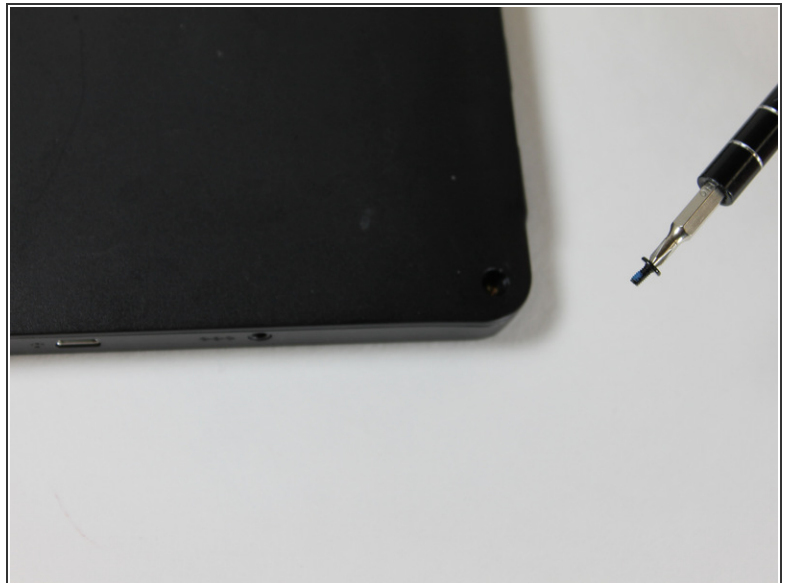

- Using a Philips screwdriver, remove all four .15 mm screws from each corner.
- Set aside.




## Step 3



- Using the plastic opening tool, remove the back cover of the device.

## Step 4

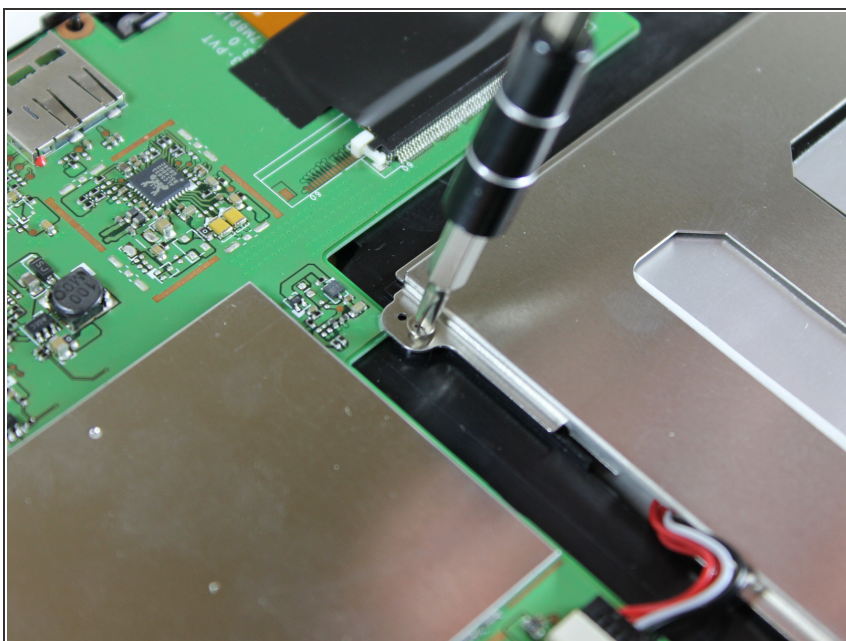

- Remove the three .11 mm screws that hold the battery in place.
- Set aside.



## Step 5



- Unplug the battery and remove from device.

⚠ Caution: avoid touching the motherboard as it is fragile.

## Step 6 — Front Facing Camera

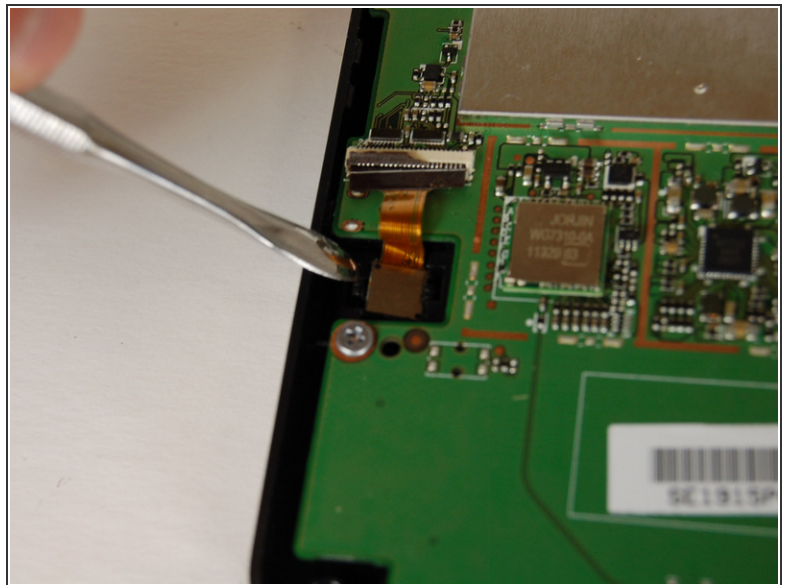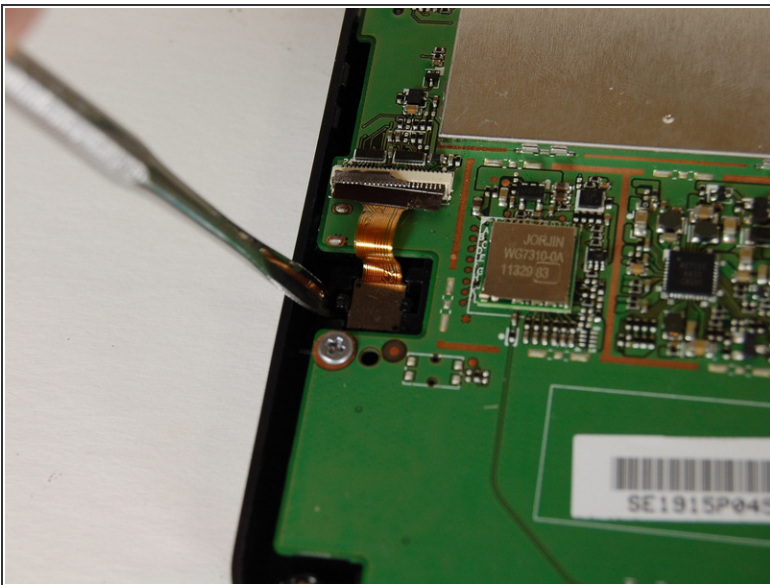

- Use a metal pry tool to separate the camera and the small clip that holds it in place.

⚠ Do **NOT** touch the MotherBoard with your bare hands. There is risk of short circuiting the device. Use nitrile gloves to prevent this.



## Step 7



- Use a pair of small tweezers to gently pull the camera connector out of the motherboard.

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2017-12-04 06:13:50 PM.